




## 玻璃纤维方格布复合毡 Woven Roving Combo Mat

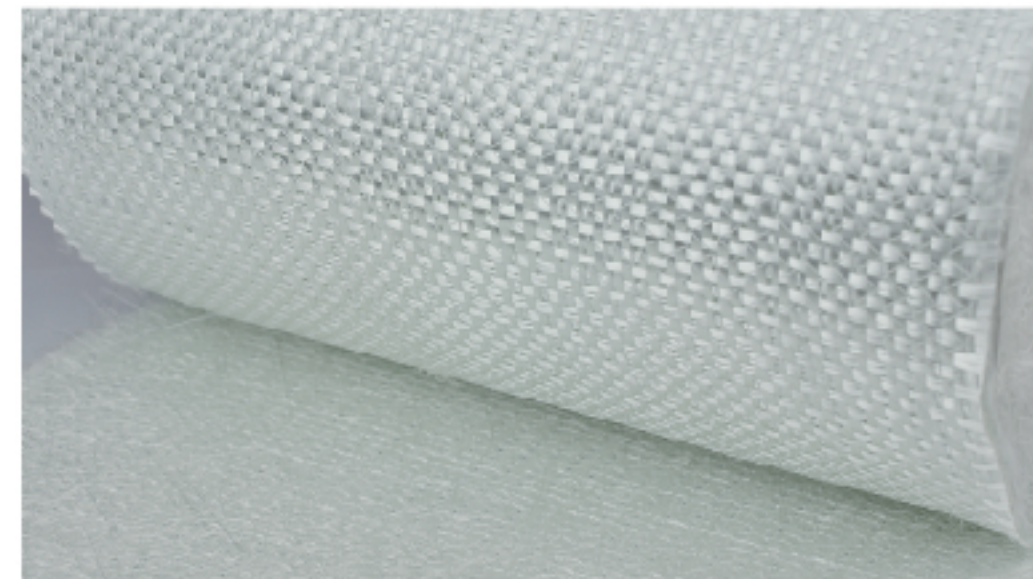

众杰玻璃纤维方格布复合毡是由玻璃纤维方格布复合一层均匀无定向平铺的短切原丝，使用聚酯缝编线编织而成。适用于各种树脂增强系统，如不饱和聚酯树脂，乙烯基树脂和环氧树脂等。广泛应用于手糊、拉挤、RTM、真空等成型产品，如船舶、汽车箱体，大型板材，冷藏器具及其他玻璃钢制品。

Woven roving combo mat is made of woven roving and chopped fiberglass strand complex of, then stitched together with polyester yarn. It is compatible with Polyester, Vinyl and Epoxy resin and widely used in boat building, Auto parts, refrigerated tools and structural sections industry etc, suitable for hand lay up, RTM, pultrusion, vacuum processes.

## 基本数据 General Data

规格型号 Code	质量 Weight (g/m <sup>2</sup> )	方格布克重 Woven roving (g/m <sup>2</sup> )	短切层克重 Chopped strand (g/m <sup>2</sup> )	含水率% Moisture Content	浸透速度 Wet speed (≤S)	结构层数 Layer
EWRM200/200	400	200	200	≤0.2	60	2
EWRM300/300	600	300	300	≤0.2	60	2
EWRM400/300	700	400	300	≤0.2	60	2
EWRM500/300	800	500	300	≤0.2	60	2
EWRM500/450	950	500	450	≤0.2	60	2
EWRM600/300	900	600	300	≤0.2	60	2
EWRM600/450	1050	600	450	≤0.2	60	2
EWRM800/300	1100	800	300	≤0.2	60	2
EWRM800/450	1250	800	450	≤0.2	60	2

### Remarks:

Roll width: Standard width in 1250mm, 1270mm, and other sizes depends on customer's real needs, available in 200mm to 2600mm.  
Packing: Fiberglass woven roving combo mat is usually rolled in a paper tube with inner diameter 76mm. The roll is warped with plastic film, then put into carton. Lay the rolls horizontally, and can be loaded on pallets and bulk in container.  
Storage: The product should be stored in a cool, water-proof area. It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively. Please keep the product in its original packaging before being used, avoiding moisture absorption.



## 彩胶 Color Gelcoat



类型	产品型号	粘度	胶凝时间	拉伸强度	弯曲强度	冲击强度	巴氏硬度	热变形温度	断裂延伸率
邻苯型	GCO1034-****H	H:3500-5500	5.0-18.0	68	95	10	46	70	2.1
	GCO1052-****S	S:1500-2500	5.0-18.0	65	95	10	43	68	2.2
间苯型	GCI2030-****H/S	H:3500-5500 S:1500-2500	5.0-18.0	68	100	11	43	75	2.4
	GCI2031-****H/S		5.0-18.0	68	120	12	43	81	2.6
	GCI2033-****H/S		5.0-18.0	68	120	13	38	60	3
间苯辛戊二醇型	GCN3068-****H/S	H:3500-5500 S:1500-2500	5.0-18.0	68	100	12	41	90	2.6
模具胶衣	GCM6082-****H/S	H:3500-5500 S:1500-3000	10.0-20.0	62	120	12	45	95	3
	GCM6086-****H/S		10.0-20.0	83	150	15	45	110	4
洁具胶衣	GCS7072-****H/S	H:3500-5500 S:1500-2500	5.0-18.0	65	100	10	47	105	2.8
平板胶衣	GCP8033-****H/S	H:3500-5500 S:1500-2500	5.0-18.0	68	95	10	46	70	2.1
易打磨胶衣	GCT9001-****H/S	H:2500-5500 S:1500-2500	5.0-18.0	60	90	9	30	80	2
	GCT9031-****S			68	100	10	30	90	2.6
风电用胶衣	GCT9061-****S	S:1500-2500	5.0-18.0	68	100	12	41	90	2.6

包装: 镀锌桶包装(可衬内袋), 20公斤/桶

贮存: 阴凉干燥处贮存, 远离火种, 常温下保质期三个月(特殊颜色和品种除外)